
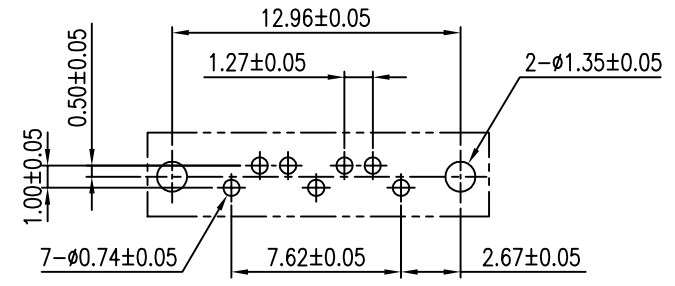



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

# CUSTOMER DRAWING ORIGINAL

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		RELEASE FOR RoHS	11/23/2006	Edward Wu

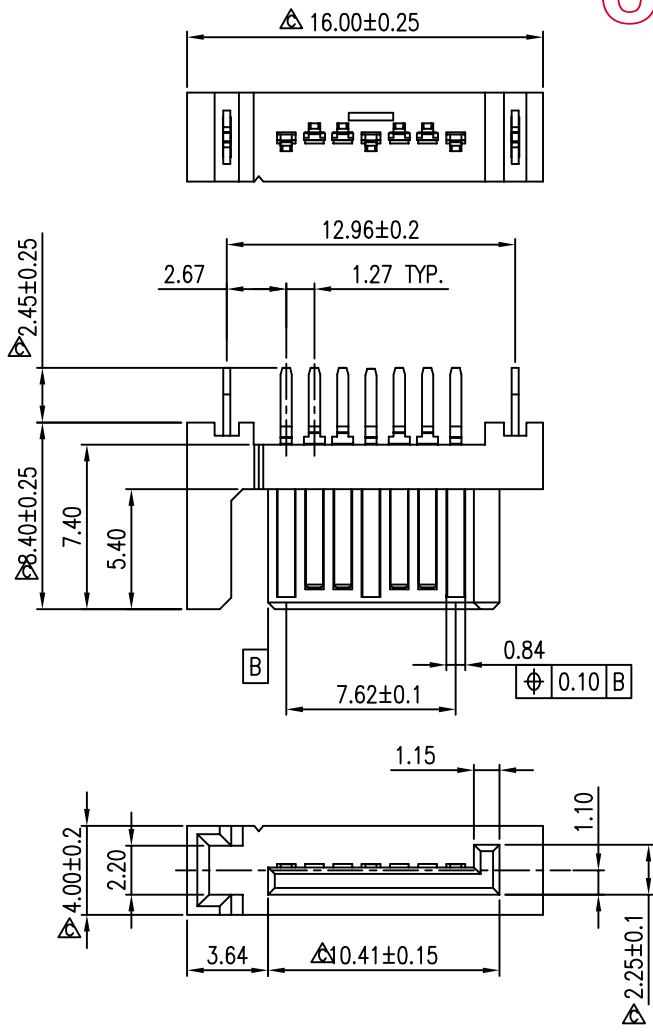

PCB LAYOUT TOLERANCE ±0.05  
(TOP VIEW)

- NOTES:
- INSULATOR: NYLON 9T, UL 94V-0, COLOR- BLACK
  - CONTACT: BRASS, SELECTIVE GOLD PLATING ON CONTACT AREA, MATTE TIN PLATING ON SOLDERING TAIL
  - CONTACT FINISH CODES: "0"- GOLD FLASH  
"1"- 15μ" GOLD  
"2"- 30μ" GOLD
  - BOARDLOCK: BRASS, NICKEL PLATED OVERALL
  - THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR RoHS.
  - THIS PRODUCT JUST BE FOR DIP PROCESS ONLY
  - △ IS CRITICAL DIMENSIONS

TOLERANCE m/m		APPROVALS	DATE	TITLE		<h2 style="margin: 0;">Amphenol®</h2> <p style="margin: 0;">Amphenol Corporation Amphenol Taiwan Corporation</p>	
x.	±0.30	DRAWN XL Wu	11/23/06	HIGH SPEED SERIALIZED AT ATTACHMENT STRAIGHT, DIP TYPE SIGNAL, 7-POS., MALE			
x.x	±0.25	CHECKED Sondra Sang	11/23/06			SHEET	1 OF 1
x.xx	±0.15	APPROVED Edward Wu	11/23/06			REV.	A
x.xxx	±0.08			SIZE	A4	PART NO.	G16A 2X21 M4EU
ANGULAR	±2°			DRAWING NO.	SKT-G16A2X21M4EU-16		
UNLESS OTHERWISE SPECIFIED		UNIT	MM				