
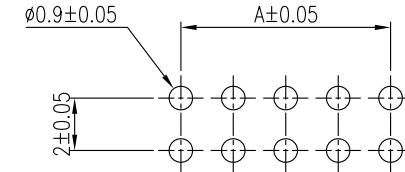


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.



The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2002/95/EC for RoHS compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1		RELEASE TO PRODUCTION	11/02/2008	Hank Hsu

VAMMO1

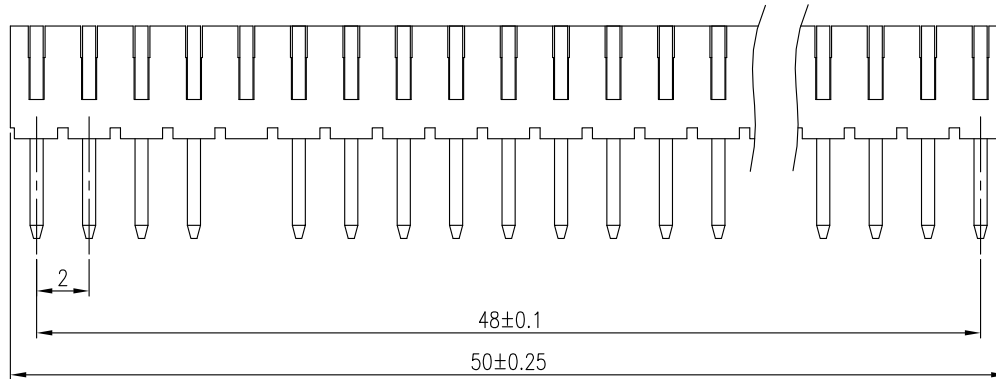

RECOMMENDED PCB LAYOUT

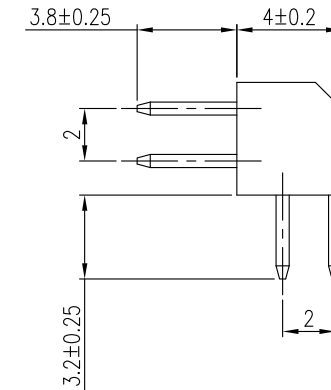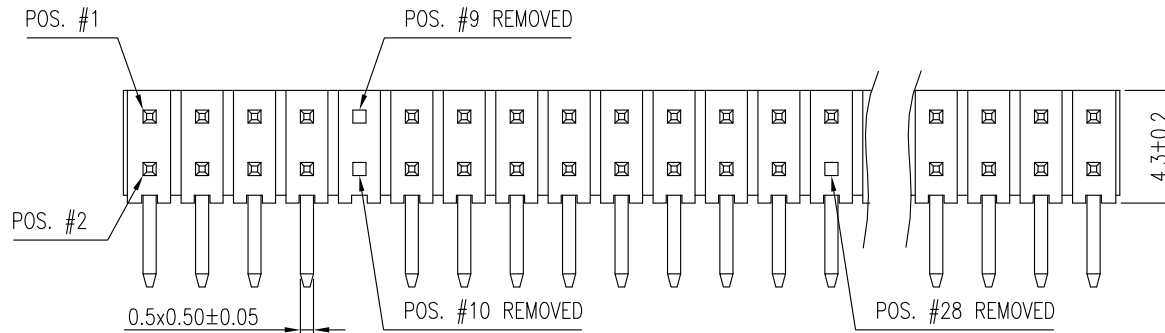

NOTES:

1. INSULATOR: POLYESTER (NYLON-6T), UL94V-0, COLOR- BLACK
2. CONTACT: COPPER ALLOY, SELECTIVE TIN OR GOLD PLATED
3. CURRENT RATING: 2 AMP
4. INSULATOR RESISTANCE: 1000 MEGOHMS MIN.
5. DIELECTRIC WITHSTANDING: 500V AC/ DC
6. CONTACT RESISTANCE: 20 MILLIOHMS MAX.
7. OPERATING TEMPERATURE: -40°C TO +105°C
8. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2002/95/EC FOR RoHS COMPLIANT.

**PRELIMINARY RELEASE  
SUBJECT TO CHANGE**

TOLERANCE	APPROVALS	DATE	TITLE	UNIT			PART No.		
X. ±0.30	DRAWN Roger Tsai	12/02/2008	PCB HEADER 2.0 MM PITCH R/A PCB MOUNT, 50-POS. #9, #10 & #28 REMOVED	mm	SIZE	A3	G825CA502XBEU		
X.X ±0.20	CHECKED Daniel Hsieh	12/02/2008		NA	SHEET	1 OF 1	G825CA502XBEU		
X.XXX ±0.10	APPROVED Hank Hsu	12/02/2008		SCALE	REV.	AX1			
ANGULAR ±1°	DWG TYPE CUST DWG	PROJECT CODE HEAD							
UNLESS OTHERWISE SPECIFIED									

