

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2002/95/EC for RoHS compliant.






# CUSTOMER DRAWING ORIGINAL




REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		RELEASE TO PRODUCTION	12/11/2007	Hank Hsu

G800 LQ 556 XXX EU	2 x 40 = 80	101.6	99.06
G800 LQ 557 XXX EU	2 x 39 = 78	99.06	96.52
G800 LQ 558 XXX EU	2 x 38 = 76	96.52	93.98
G800 LQ 559 XXX EU	2 x 37 = 74	93.98	91.44
G800 LQ 560 XXX EU	2 x 36 = 72	91.44	88.90
G800 LQ 561 XXX EU	2 x 35 = 70	88.90	86.36
G800 LQ 562 XXX EU	2 x 34 = 68	86.36	83.82
G800 LQ 563 XXX EU	2 x 33 = 66	83.82	81.28
G800 LQ 564 XXX EU	2 x 32 = 64	81.28	78.74
G800 LQ 565 XXX EU	2 x 31 = 62	78.74	76.20
G800 LQ 566 XXX EU	2 x 30 = 60	76.20	73.66
G800 LQ 567 XXX EU	2 x 29 = 58	73.66	71.12
G800 LQ 568 XXX EU	2 x 28 = 56	71.12	68.58
G800 LQ 569 XXX EU	2 x 27 = 54	68.58	66.04
G800 LQ 570 XXX EU	2 x 26 = 52	66.04	63.50
G800 LQ 571 XXX EU	2 x 25 = 50	63.50	60.96
G800 LQ 572 XXX EU	2 x 24 = 48	60.96	58.42
G800 LQ 573 XXX EU	2 x 23 = 46	58.42	55.88
G800 LQ 574 XXX EU	2 x 22 = 44	55.88	53.34
G800 LQ 575 XXX EU	2 x 21 = 42	53.34	50.80
G800 LQ 576 XXX EU	2 x 20 = 40	50.80	48.26
G800 LQ 577 XXX EU	2 x 19 = 38	48.26	45.72
G800 LQ 578 XXX EU	2 x 18 = 36	45.72	43.18
G800 LQ 579 XXX EU	2 x 17 = 34	43.18	40.64
G800 LQ 580 XXX EU	2 x 16 = 32	40.64	38.10
G800 LQ 581 XXX EU	2 x 15 = 30	38.10	35.56
G800 LQ 582 XXX EU	2 x 14 = 28	35.56	33.02
G800 LQ 583 XXX EU	2 x 13 = 26	33.02	30.48
G800 LQ 584 XXX EU	2 x 12 = 24	30.48	27.94
G800 LQ 585 XXX EU	2 x 11 = 22	27.94	25.40
G800 LQ 586 XXX EU	2 x 10 = 20	25.40	22.86
G800 LQ 587 XXX EU	2 x 9 = 18	22.86	20.32
G800 LQ 588 XXX EU	2 x 8 = 16	20.32	17.78
G800 LQ 589 XXX EU	2 x 7 = 14	17.78	15.24
G800 LQ 590 XXX EU	2 x 6 = 12	15.24	12.70
G800 LQ 591 XXX EU	2 x 5 = 10	12.70	10.16
G800 LQ 592 XXX EU	2 x 4 = 8	10.16	7.62
G800 LQ 593 XXX EU	2 x 3 = 6	7.62	5.08
G800 LQ 594 XXX EU	2 x 2 = 4	5.08	2.54
PART NUMBER	NO. OF POS.	A	B

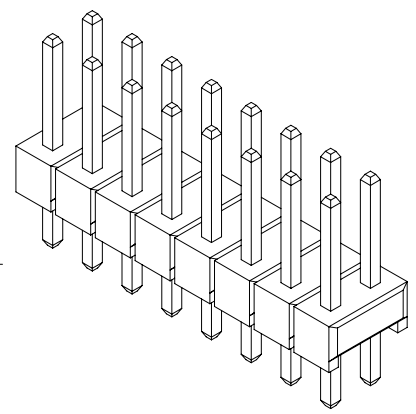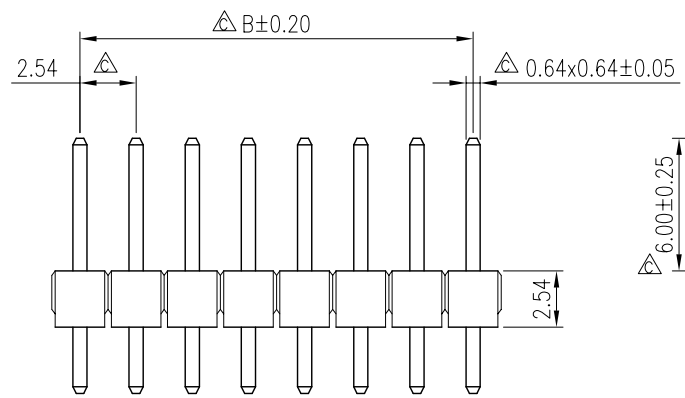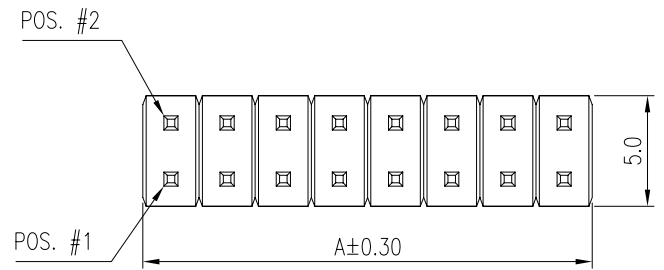

- NOTES:
- INSULATOR: LCP, UL 94V-0, COLOR- BLACK
  - CONTACT: COPPER ALLOY, "XXX"- PIN CONTACT PLATING  
 "005"- 15μ GOLD  
 "010"- 30μ GOLD  
 "018"- FULL GOLD FLASH  
 "025"- 5μ GOLD  
 "032"- FULL TIN
  - THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR RoHS.
  - PACKING IS PER AMTA PACKING SPECIFICATION PKS-0001
  - △ ARE CRITICAL DIMENSIONS

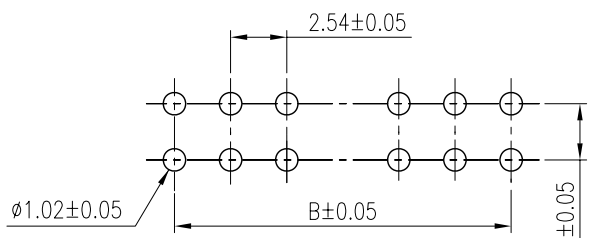

RECOMMENDED P.C.B. LAYOUT

TOLERANCE m/m		APPROVALS	DATE	TITLE		Amphenol®		
x.	±0.30	DRAWN <b>Sondra Sang</b>	12/11/07	G800 SERIES DUAL ROWS HEADER 2.54 MM PITCH STRAIGHT PCB MOUNT		Amphenol Corporation Amphenol Taiwan Corporation		
x.x	±0.25	CHECKED <b>Chenny Yeh</b>	12/11/07					
x.xx	±0.15	APPROVED <b>Hank Hsu</b>	12/11/07					
x.xxx	±0.08			SIZE	PART NO.	DWG NO.	SCALE N.A. SHEET 1 OF 1	
ANGULAR	±2°			A4	G800 LQ XXX XXX EU	HEAD-G800LQXXXXXXEU_2-13	REV. A	
UNLESS OTHERWISE SPECIFIED			UNIT	MM				