


This document is the property of Amphenol Corporation and is delivered on the express condition that it not be disclosed, reproduced or used in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document. The marking on this product doesn't contain environmental hazardous materials per Halstead Specification 35-00293 for Sony Gp compliant or per directive 2002/95/EC for RoHS compliant.



SYM		EQU No.		DESCRIPTION		DATE		APPROVED	
AXI	MFG	REV	NO	PROPOSAL	DATE	BY	CHK	XXX	XXX

REVISIONS

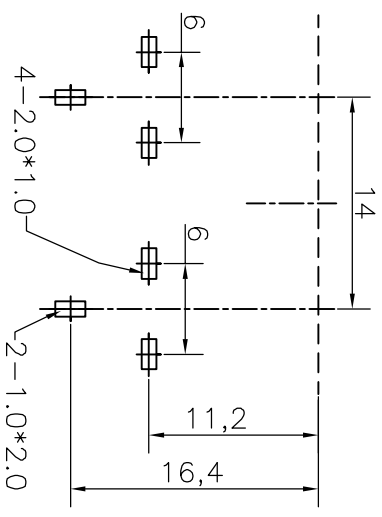

P.C.B. HOLE LAYOUT
(BOTTOM VIEW)

SPECIFICATION
 1. Rating : DC 30V 0.5A
 2. Contact resistance: $\leq 50m\Omega$
 3. Insulation resistance: $>100M\Omega$ (DC250V)
 4. Withstand voltage: 250VAC
 5. Insertion and extraction force: 3-25N
 6. Life test: 1,000 cycles

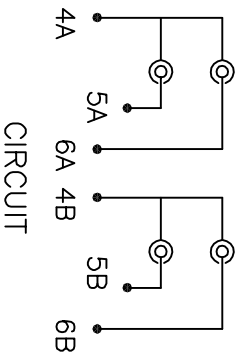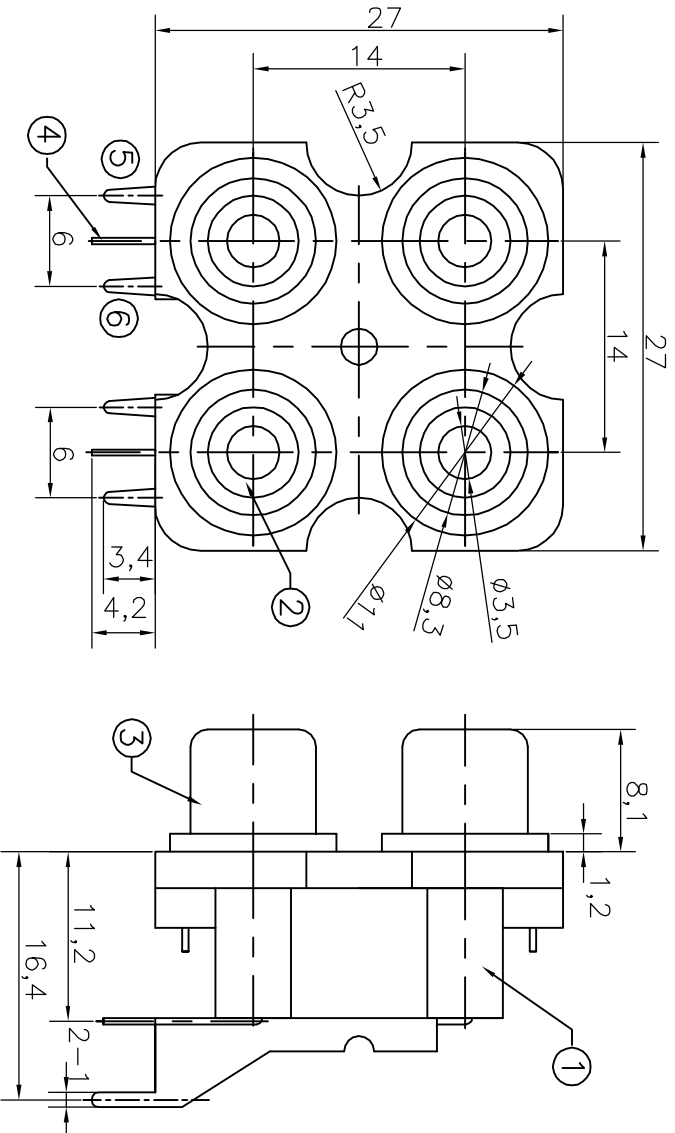

NO.	NAME	TITLE	MATERIAL	FINISH
6	TERMINAL 3	BRONZE	$t=0.4$	Sn PLATED
5	TERMINAL 2	BRONZE	$t=0.4$	Sn PLATED
4	TERMINAL 1	BRONZE	$t=0.4$	Sn PLATED
3	TUBE	BRONZE	$t=0.35$	Ni PLATED
2	INSULATOR	A.B.S.		SEE COLOR
1	BODY	A.B.S.		BLACK

TOLERANCE	DESIGNED	DATE	RCA JACK	Amphenol Corporation
X, ± 0.30	Roger Tsai	04/13/2009	VERTICAL, DIP TYPE	Amphenol Taiwan Corporation
X,XX, ± 0.20	Daniel Hsieh	04/13/2009		
X,XXX, ± 0.10	Hank Hsu	04/13/2009		
ANGULAR $\pm 1^\circ$	APPROVED	DATE		
UNLESS OTHERWISE SPECIFIED	DWG TYPE	PRODUCT CODE		
	CUST DWG	OTHER		

UNIT	SCALE	SHEET	PART No.	DWG No.	REV
mm	NA	1 OF 1	GMSBXXXXXXXEU	GMSBXXXXXXXEU	AXI

Amphenol®

Amphenol Corporation
Amphenol Taiwan Corporation