


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2002/95/EC for RoHS compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1		NON-RELEASE REVISION	07/30/2009	Arron Lin



**PRELIMINARY RELEASE
SUBJECT TO CHANGE**

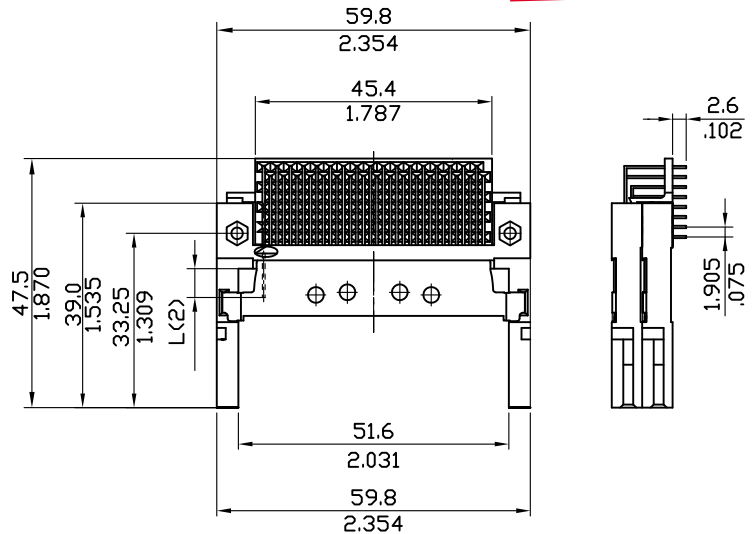

PART NO. G659BEU2X2B40X


VOLTAGE KEY OPTION
3: 3.3 VOLT
5: 5.0 VOLT

CONTACT FINISH
0: GOLD FLASH
1: 30 μ" GOLD
2: 12 μ" GOLD

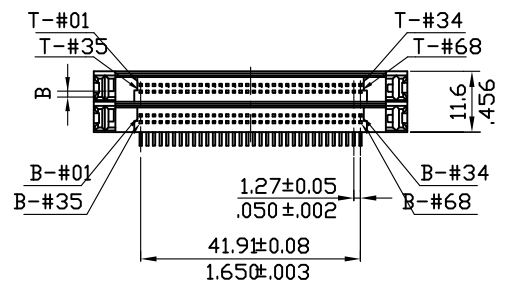

NOTES:

- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, UL94V-0, COLOR: BLACK.
TERMINAL: COPPER ALLOY.
- FINISH:
TERMINAL:
CONTACT AREA: SELECTED GOLD PLATING;
SOLDERING AREA: TIN PLATING 100 μ" THICKNESS MIN.;
UNDER PLATING: NICKEL PLATING 50 μ" THICKNESS MIN. OVERALL.
- PACKING IS PER AMTA PACKING SPECIFICATION PKS-0001.
- THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2002/95/EC FOR RoHS COMPLIANT.

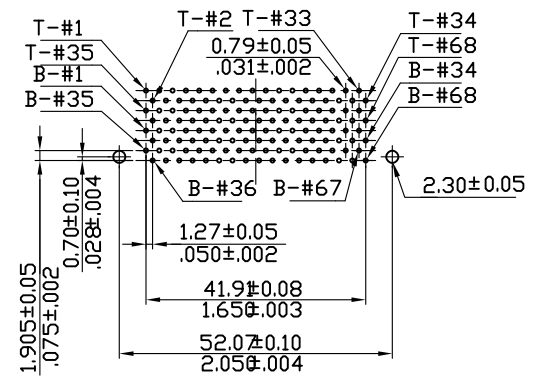

RECOMMENDED HOLE PATTERN

VOLTAGE	DIM B
3.3 V	2.2 MM
5.0 V	1.1 MM

PIN TYPE	DIM. L	PIN NUMBER
DETECT	3.50(.138)	36, 67
GENERAL	4.25(.167)	ALL OTHER PINS
POWER	5.00(.197)	1,17,34,35,51,68

(2)

TOLERANCE	APPROVALS	DATE	TITLE	Amphenol® Amphenol Corporation Amphenol Taiwan Corporation			
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	DRAWN Daniel Hsieh	07/30/2009	PCMCIA dual deck 68pos, w/o shielded	UNIT mm	SIZE A3	PART No. G659BEU2X2B40X	REV. AX1
ANGULAR ±1°	CHECKED Roger Tsai	07/30/2009					
UNLESS OTHERWISE SPECIFIED	APPROVED Arron Lin	07/30/2009	PROJECT CODE OTHER	SCALE NA	SHEET 1 OF 1	DWG No. G659BEU2X2B40X	