

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


The marking on this product doesn't contain environmental hazardous materials per Material Specification 55-00259 for Sony GP compliant or per directive 2002/95/EC for RoHS compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1		NON-RELEASE REVISION	08/12/2009	Arron Lin
AX2		MODIFIED PCB DIMENSION	02/23/2010	Roger Tsai

**PRELIMINARY RELEASE
SUBJECT TO CHANGE**






NOTES:

- MATERIAL:**
HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, UL94V-0, COLOR: BLACK.
TERMINAL: PHOSPHOR BRONZE.
BOARD LOCK: BRASS.
- FINISH:**
TERMINAL:
CONTACT AREA: SELECTED GOLD PLATING;
SOLDERING AREA: TIN PLATING 100 μ" THICKNESS MIN.;
UNDER PLATING: NICKEL PLATING 50 μ" THICKNESS MIN. OVERALL.
BOARD LOCK:
SOLDERING AREA: TIN PLATING 100 μ" THICKNESS MIN.
- PACKING IS PER AMTA PACKING SPECIFICATION PKS-0001.**
- THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2002/95/EC FOR ROHS COMPLIANT.**

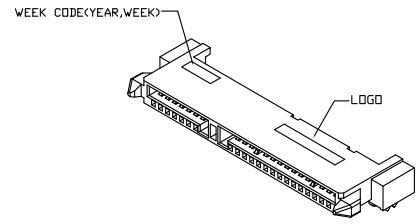


PART NO. G16CE7X110KEU

- CONTACT FINISH**
- 0: GOLD FLASH
 - 1: 15 μ" GOLD
 - 2: 30 μ" GOLD

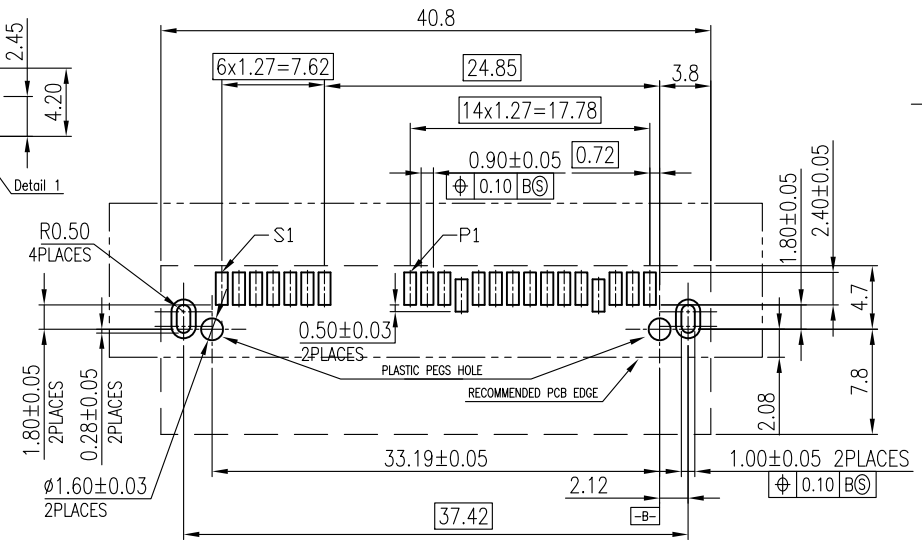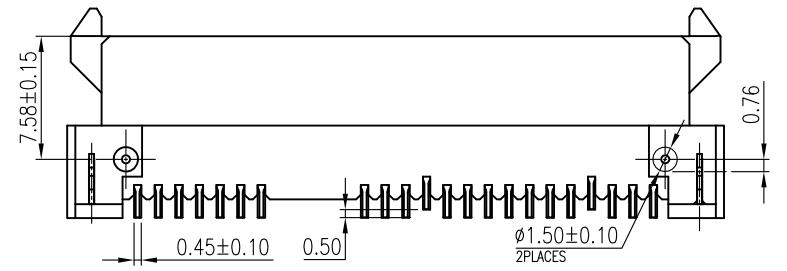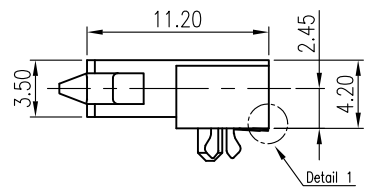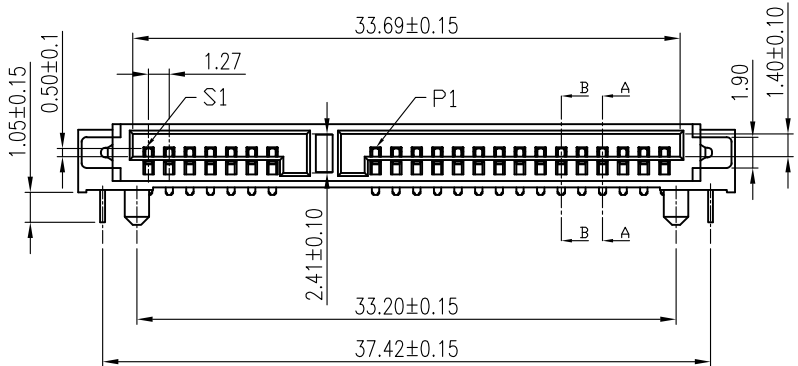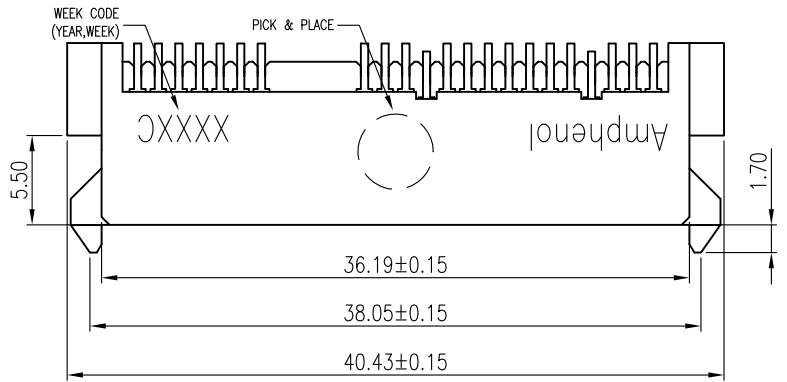

RECOMMENDED P.C.B. LAYOUT (COMPONENT SIDE)
TOLERANCE: ±0.05 (TOP VIEW)

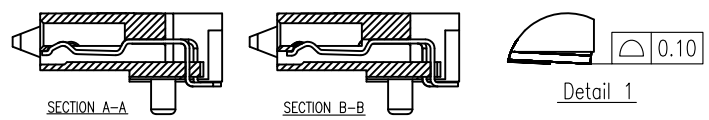

TOLERANCE		APPROVALS		DATE	TITLE		Amphenol®				
X.		DRAWN	Roger Tsai	02/23/2010	SERIALSATA HOST CONNECTOR 1.27mm PITCH, 22 CIRCUITS TOP MOUNT, SMT TYPE		Amphenol Corporation Amphenol Taiwan Corporation				
X.X	±0.30	CHECKED	Chenny Yeh	02/23/2010							
X.XX	±0.20	APPROVED	Roger Tsai	02/23/2010							
X.XXX	±0.10	ANGULAR		±1°	UNIT mm		SIZE A3	PART No. G16CE7X110KEU			
UNLESS OTHERWISE SPECIFIED		DWG TYPE		CUST DWG	PROJECT CODE		SKT	SCALE NA	SHEET 1 OF 1	DWG No. G16CE7X110KEU	REV. AX2